


POLYGLASS ROOFING SYSTEM DETAIL

POLYGLASS ROOF COATING SYSTEM

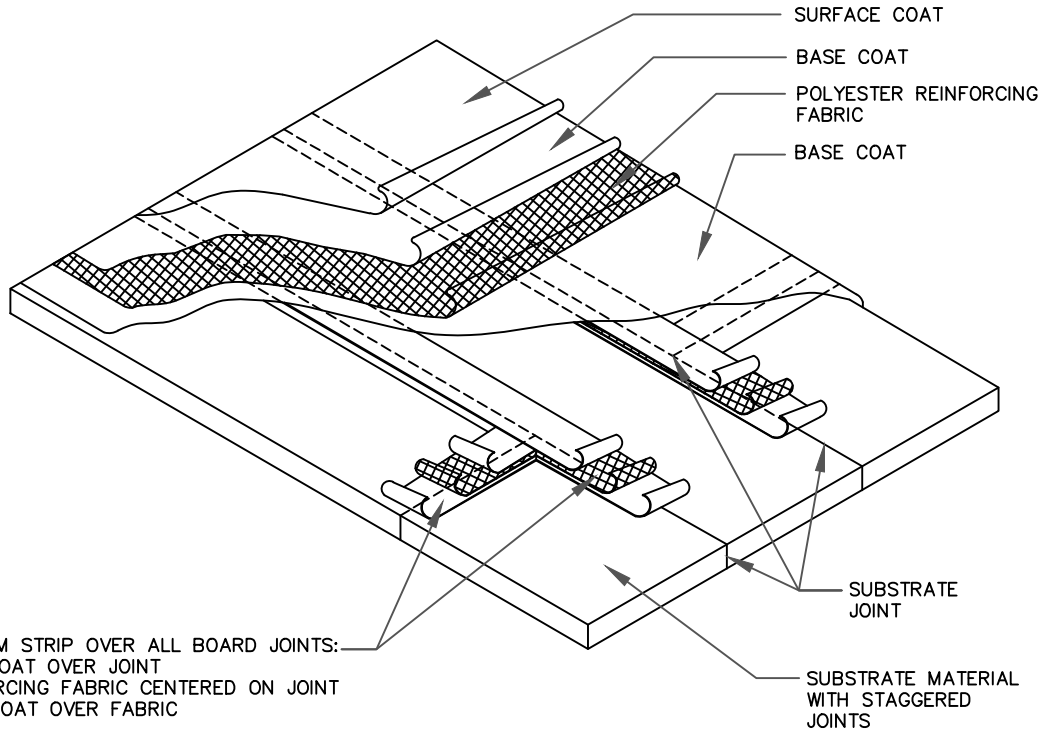

DETAIL KEYNOTES

- SURFACE COAT POLYGLASS ELASTOMERIC ROOF COATINGS.
- BASE COAT POLYGLASS ELASTOMERIC ROOF COATINGS.
- FLASHING COMPOUND POLYGLASS FLASHING COMPOUND AS REQUIRED. APPLY AT 1/8" THICK AND USE WITH POLYESTER REINFORCEMENT.
- POLYESTER POLYGLASS REINFORCING POLYESTER.
- SURFACE PREPARATION ENSURE SURFACES ARE FREE OF ANY SURFACE CONTAMINATES. IF OXIDATION IS PRESENT, GRINDING AFFECTED AREAS WITH WIRE BRUSH IS NECESSARY. THEN PRIME ENTIRE ROOF WITH POLYBRITE 74 RUST INHIBITOR PRIMER APPLIED AT THE RATE OF 18-24 WET MILS (150-180 SQUARE FEET PER GALLON).

DECK JOINT
STRIPPING DETAIL

NUMBER:

PG-DJS-003

DATE:

AUGUST 2016



www.polyglass.com