


POLYGLASS ROOFING SYSTEM DETAIL

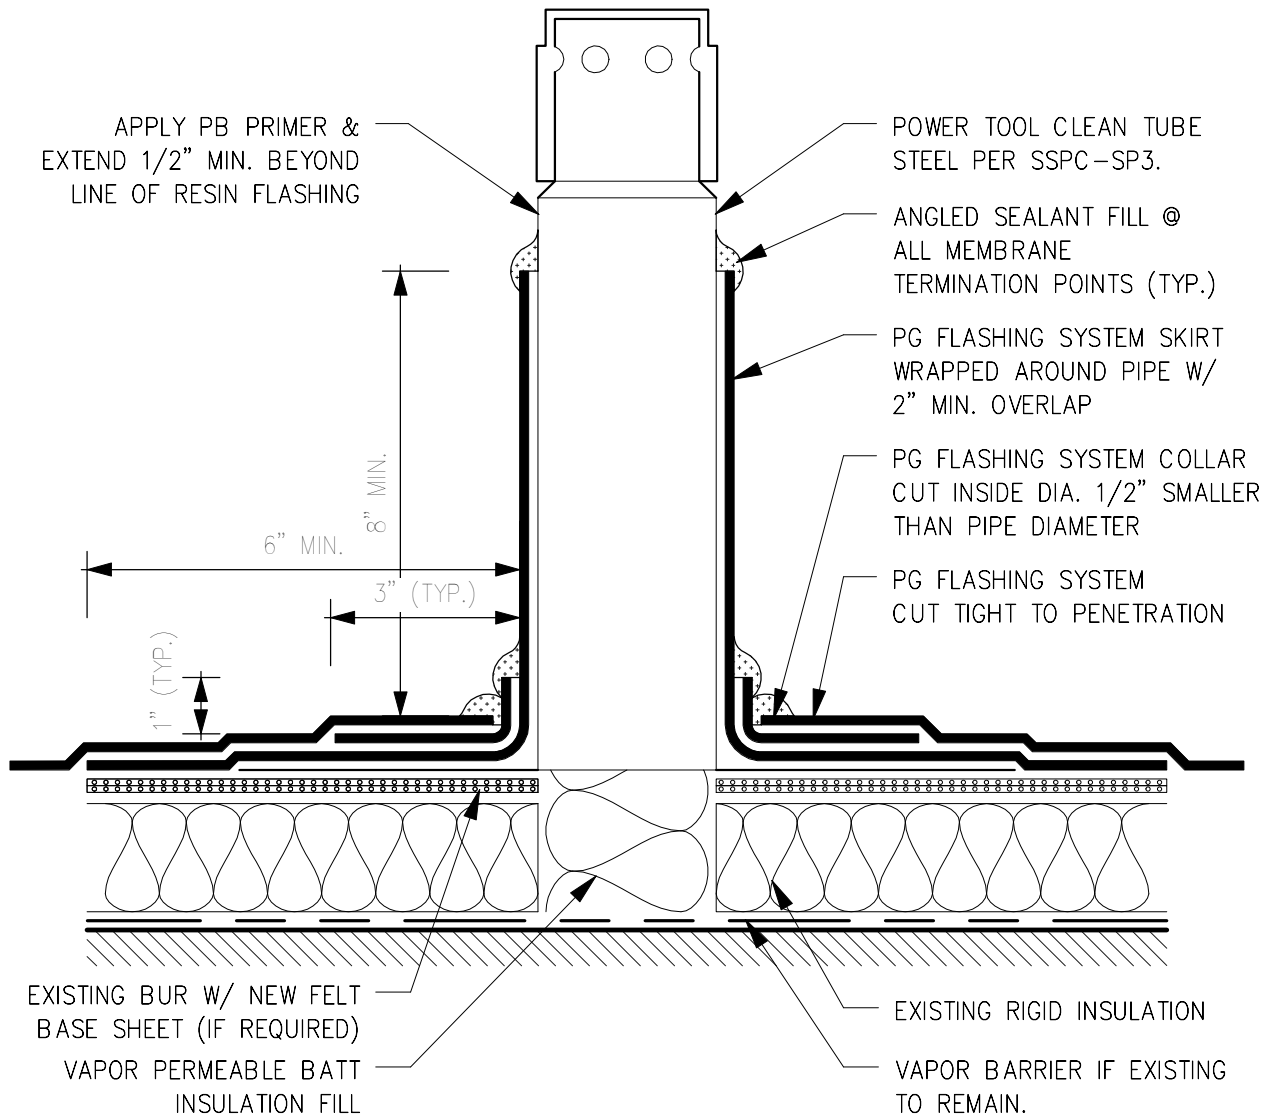

KEYNOTES:

- 1) Cleaning and Preparation – Clean and prepare the surface by brooming, mild detergent & water rinse or as required to remove any conditions that could adversely affect adhesion of primers and liquid materials.
- 2) Surfaces to receive PG Flashing System should be primed with Polyflash Primer 1400. For porous substrates use Polyflash Primer 2500.
- 3) PG Flashing System consists of the following;
  - Polybrite base coat material
  - Polybrite Fleece 165
  - Polybrite surface coat material
- 4) Illustration and notations intended for generalized applications only. Please refer to Product Data Sheets for additional information.
- 5) Urethane sealant for terminations shall be compliant with ASTM C920.
- 6) PG recommends that all metal flashings in connection with PG Flashing System shall be designed and installed in compliance with ANSI/SPRI ES-1.

MECHANICAL MOISTURE VENT  
FLASHING

NUMBER:

PG-LF-PEN-05

DATE:

MARCH 2016



www.polyglass.com