

# STICK'N'COAT


Quality Roof Systems by Polyglass



## STICK'N'COAT"

• Different system options for all budgets • Reduce the temperature of the building and save energy costs

• Quality products that offer superior performance

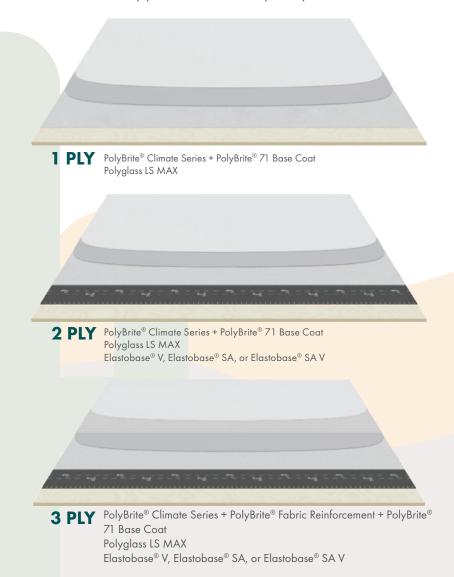

Substrates: Approved High-Density Insulation, OSB, Plywood

This Stick N Coat System is designed for installation in hot/dry climate zones (ASHRAE 90.1 Climate Zones 1b & 2b).

For installations in areas outside those climate zones, please call Polyglass Technical Services.

7 Year to 25 Year Warranties Available	Good	Better	Best
Improve your system warranty by upgrading your coating (Warranty term dependent on product used and assembly configuration)	PolyBrite <sup>®</sup> <b>31 св</b>	PolyBrite® <b>33cs</b>	PolyBrite® <b>35ca</b>
(warranny term dependent on product used and assembly configuration)	Term	Term	Term
1-Ply (Polyglass LS MAX & Coating)	7 Year	10 Year	12 Year
<b>2-Ply</b> (Elastobase® V, Elastobase® SA or Elastobase® SA V, Polyglass LS MAX & Coating)	10 Year	15 Year	20 Year
<b>3-Ply</b> (Elastobase® V, Elastobase® SA or Elastobase® SA V, Polyglass LS MAX, Fabric Reinforcement & Coating)	15 Year	20 Year	25 Year

The Polyglass Stick`n 'Coat systems offer a variety of cost effective and energy saving roofing options.

These systems are made with quality materials and offer a solution for multiple substrates, budget and warranty needs.

#### System Benefits:

- Polyglass offers all the product components needed for these systems one stop shop
- A variety of systems which can be used on new construction or tear off and replace roofs
- Offers excellent resistance to extended exposure to solar ultraviolet energy
- Can decrease the roof surface temperature, thereby reducing energy costs
- Superior tensile strength for a strong roof
- Easy to install, no kettle, no torch and no special tools or equipment needed other than a heavy roller
- Much safer than traditional hot asphalt BUR or torch down systems
- Should reduce the cost of insurance for the roofing contractor
- · Low VOC and odor presents minimal hazard to the applicator or the environment
- Resistant to dirt pick-up easy to maintain
- Fungal and algal resistant
- Excellent resistance to light foot traffic and hail (PolyBrite® 35cA only)

Coating Products					
Products		Colors	Packaging		
PolyBrite® 31	СВ	White, Kool Grey and Tan	5 Gallon (18.9 Liters) Pail 55 Gallon (208.1 Liters) Drum 250 Gallons (945 Liters) Tote		
PolyBrite® 33	CS	White, Kool Grey and Tan	5 Gallon (18.9 Liters) Pail 55 Gallon (208.1 Liters) Drum 250 Gallons (945 Liters) Tote		
PolyBrite® 35	CA	White, Kool Grey and Tan	5 Gallon (18.9 Liters) Pail 55 Gallon (208.1 Liters) Drum 250 Gallon (945 Liters) Tote		
PolyBrite® 7	1	Kool Grey	5 Gallon (18.9 Liters) Pail 55 Gallon (208.1 Liters) Drum 250 Gallon (945 Liters) Tote		
PolyBrite® 3	9	White and Tan	2 Gallon (7.5 Liters) Pail 5 Gallon (18.9 Liters) Pail		
PolyBrite® Reinforcing Fab	oric	White	6" x 300 linear feet roll 40" x 324 linear feet roll		

Primary Membrane Products						
Products	Net Coverage (approx)	Length	Width			
Polyglass LS MAX	200 ft <sup>2</sup> (18.5 m <sup>2</sup> )	65' 8" (20m)	39 3/8" (1m)			
Base Sheets						
Elastobase® SA	200 ft <sup>2</sup> (18.5 m <sup>2</sup> )	65' 8" (20m)	39 3/8" (1m)			
Elastobase® V	200 ft <sup>2</sup> (18.5 m <sup>2</sup> )	65' 8" (20m)	39 3/8" (1m)			
Elastoflex SA V	200 ft <sup>2</sup> (18.5 m2)	65′ 8" (20m)	39 3/8" (1m)			

#### Codes and Credentials: (credentials vary by product)














WHITE ONLY









### **POLYGLASS U.S.A., Inc.**

1111 West Newport Center Drive Deerfield Beach, FL 33442 pgmarketing@polyglass.com Customer Service: (800) 222-9782

polyglass.us

