

POLYFORZA™ DRIP EDGE

DRIP EDGE FOR BUR/MODIFIED SYSTEMS

PRODUCT DESCRIPTION

PolyForza Drip Edge is a convenient and economical drip edge system. Its concealed splice plate design prevents migration under the cover panels and provides proper spacing for thermal movement of the material. PolyForza Drip Edge is specifically designed for use with APP and SBS torch-applied assemblies.

FEATURES AND BENEFITS

- Provided in 12'-0" lengths with pre-punched holes for quicker installation and lower labor cost.
- Slotted fastening holes to allow for proper thermal movement of the materials and ensure correct fastener placement and spacing.
- Factory fabricated miters and accessories provide a cleaner, more aesthetically pleasing appearance. This eliminates the need for field fabrication, providing time and labor savings.
- All splice plates, gutter hangers, and fasteners are included.
- Additional accessories included are:
 - 24 ga. steel or .040" aluminum splice plates
 - 22 ga. galvanized steel continuous cleat
 - All required fasteners
- Radius is available to meet the unique needs of each project.

APPLICATION INSTRUCTIONS

See PolyForza Drip Edge Installation Instructions.

MANUFACTURING FACILITIES

- Fernley, NV
- Hazleton, PA
- Phoenix, AZ
- Waco, TX
- Winter Haven, FL

CORPORATE HEADQUARTERS

Polyglass U.S.A., Inc.
1111 West Newport Center Drive
Deerfield Beach, FL 33442
www.polyglass.us

General Line: (888) 410-1375
(954) 233-1330

Customer Service: (800) 222-9782


Technical Service: (866) 794-9659

Questions? technical@polyglass.com

Product Disclaimer: Unless otherwise incorporated into or part of a supplemental manufacturer's warranty, Polyglass warrants its product(s) against manufacturing defects that result in the material not complying with product specifications for a period of 1 year.

All data furnished refers to standard production and is given in good faith within the applicable manufacturing and testing tolerances.

Polyglass U.S.A., Inc., reserves the right to improve and change its products at any time without prior notice. Polyglass U.S.A., Inc. cannot be held responsible for the use of its products under conditions beyond its own control. For most current product data and warranty information, visit www.polyglass.us

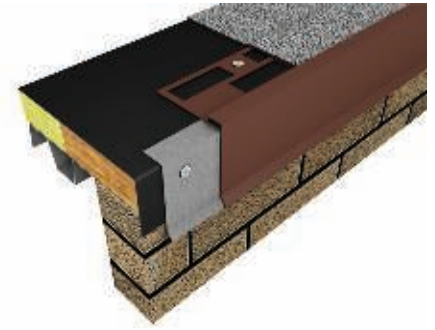

PRODUCT DATA

Materials

- 24 ga. steel
- 22 ga. steel
- 0.040" aluminum
- 0.050" aluminum
- 0.063" aluminum

Standard Sizes

- Min: 2"
- Max: 10"

APPLICABLE STANDARDS

- ANSI/SPRI/FM 4435/ES-1 Standard
- FM Approved
- Miami-Dade County Approved



AVAILABLE COLORS

Choose from over 30 colors and finishes, see color chart for color options.



www.polyglass.us