


POLYGLASS Modifleece Lap Joint Detail

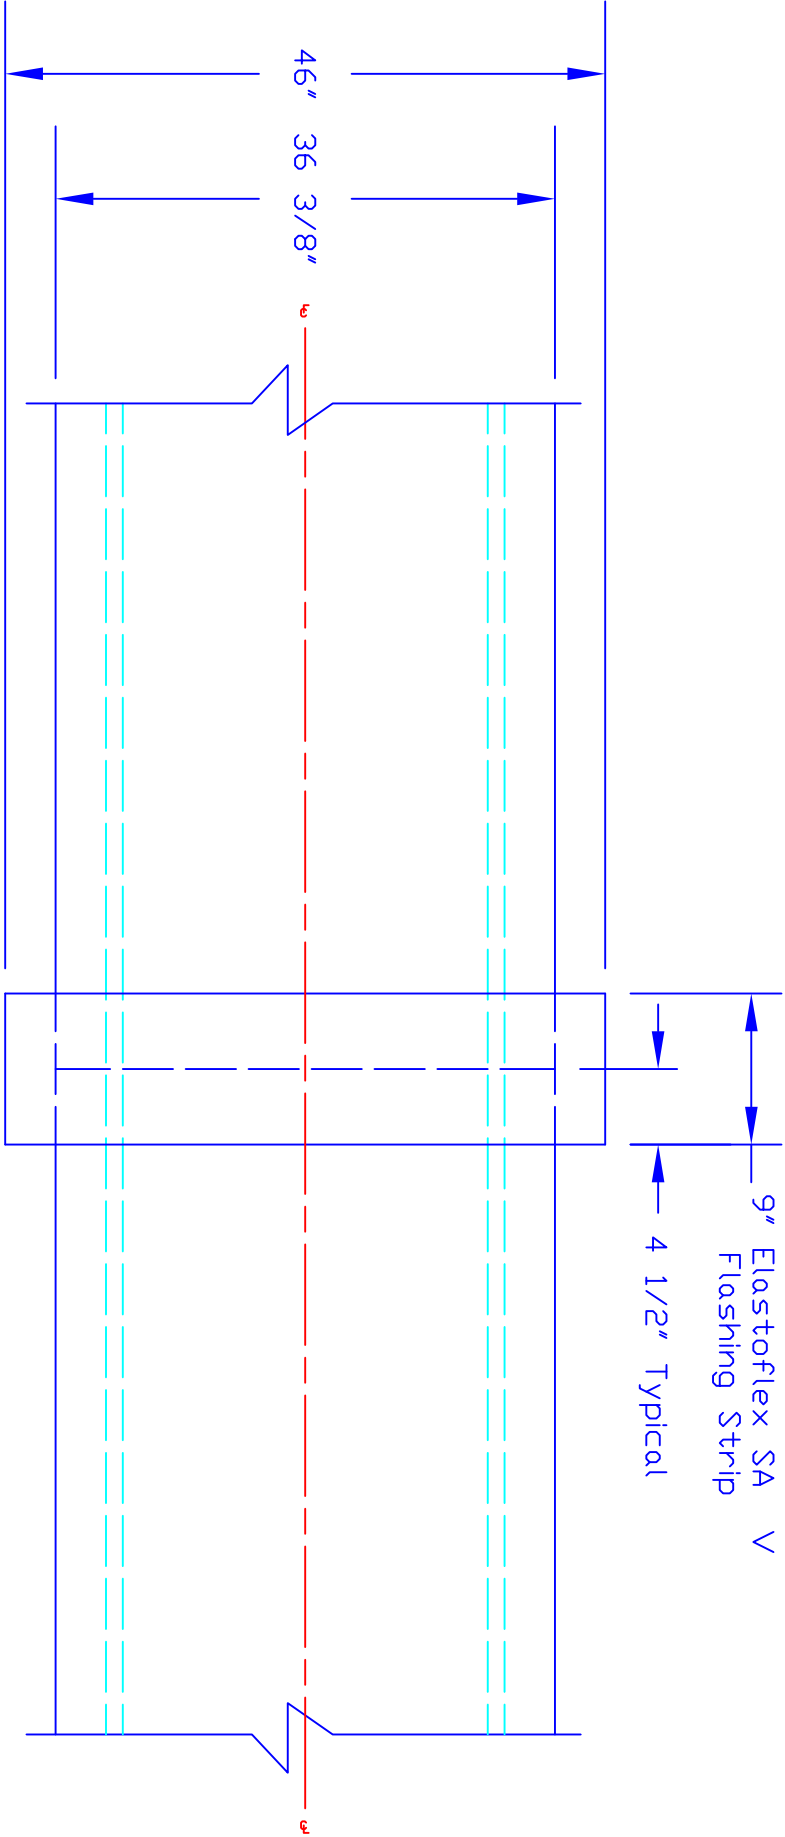

Notes:

- 1.) Modifleece is applied and set in an end to end butt joint. Joint is flashed with a minimum 9"x46" Elastoflex SA V Flashing Strip or cut piece of Polyglass self-adhered base sheet membrane. Standard lap joint detailing is required. Additional use of PP50 as sealant approved as well.
- 2.) Polyglass requires all lap joints be rolled with a silicone roller, to ensure water tight integrity of the joint detail.

Modifleece Joint Detail with  
Elastoflex SA V Flashing Strip  
(NOT TO SCALE)

NUMBER:	PG-MF-9JointDetail
DATE:	12/05/2023
DRAWN BY:	JEA
REVISION #/DATE:	Rev A, 12.12.23