

MAPEPLAN® P PIPE WRAP

PREFABRICATED PVC FLASHING WRAPS

PRODUCT DESCRIPTION

Mapeplan P Pipe Wrap are prefabricated PVC pipe wraps designed to provide watertight protection for pipe penetrations in Mapeplan PVC roofing systems. Pipe wraps are factory fabricated and hand-welded in a controlled environment to ensure consistent quality and performance. The use of prefabricated pipe wraps helps reduce field fabrication time and supports more efficient installation. Compatible with Mapeplan PVC membranes, Mapeplan P Pipe Wraps provide the same long term durability performances.

TYPICAL APPLICATIONS

- Pipe penetrations through PVC roofing systems
- Flashing repairs at existing pipe penetrations
- Retrofit flashing installations

FEATURES AND BENEFITS

- Factory-fabricated for consistent quality
- Hand-welded construction
- Helps reduce field fabrication time
- Supports faster and more consistent installation
- Manufactured from durable 60-mil PVC
- Custom configurations available upon request
- Mapeplan P Pipe Wraps come with clamps included in each box
- Available in split and non-split configurations
 - Split pipe wraps are designed for installations where access from the top of the penetration is not possible
 - Non-split pipe wraps are designed to slide over penetrations

STANDARD CONFIGURATIONS


	Height	Flange
2" Pipe Wrap	10"	5"
3" Pipe Wrap	10"	5"

AVAILABLE COLORS

White (WH) Grey (GR) Tan (TA)

APPLICATION INSTRUCTIONS

1. Install in accordance with Polyglass Technical Specifications.
2. Clean the PVC membrane in the area to receive the flashing using MEK or acetone. Allow the solvent to flash off completely before installation.
3. Position the prefabricated Mapeplan P Pipe Wrap around the penetration and center the flange on the membrane surface.
4. For split pipe wraps, align the split seam and heat weld the seam using a hand welder. Roll the weld with a silicone roller to ensure a continuous bond.
5. Heat weld the pipe wrap flange to the membrane using a hand welder and silicone roller. Ensure a continuous, watertight weld around the entire flange.
6. Secure the top of the pipe wrap around the penetration with the included pipe clamp.
7. Apply an appropriate sealant above the pipe clamp at the top of the pipe wrap to complete the flashing detail.

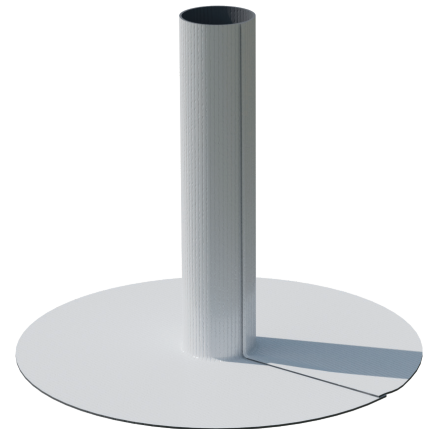

PRODUCT DATA

8 pcs/carton
48 cartons/pallet

PRODUCT CODES

2" PIPE WRAP

- 84997018 – White
- 84997019 – Tan
- 84997020 – Grey

3" PIPE WRAP

- 84997021 – White
- 84997022 – Tan
- 84997023 – Grey

MAPEPLAN® P PIPE WRAP

PREFABRICATED PVC FLASHING WRAPS

MANUFACTURING FACILITIES

- Fernley, NV
- Hazleton, PA
- Waco, TX
- Winter Haven, FL

CORPORATE HEADQUARTERS

Polyglass U.S.A., Inc.
1111 West Newport Center Drive
Deerfield Beach, FL 33442
www.polyglass.us

General Line: (888) 410-1375
(954) 233-1330

Customer Service: (800) 222-9782

Technical Service: (866) 794-9659

Questions? technical@polyglass.com

Product Disclaimer: Unless otherwise incorporated into or part of a supplemental manufacturer's warranty, Polyglass warrants its product(s) against manufacturing defects in its product that directly results in leakage for a period of 1 year.

Refer to safety data sheet (SDS) for specific data and handling of our products. All data furnished refers to standard production and is given in good faith within the applicable manufacturing and testing tolerances.

Polyglass U.S.A., Inc., reserves the right to improve and change its products at any time without prior notice. Polyglass U.S.A., Inc. cannot be held responsible for the use of its products under conditions beyond its own control. For most current product data and warranty information, visit www.polyglass.us.



www.polyglass.us