



POLYSTICK[®]

ROOF UNDERLAYMENTS

About Polyglass

Polyglass is an ISO 9001:2015 Certified, leading manufacturer of modified bitumen roofing and waterproofing membranes and roof coatings for low- and steep-slope applications with over 30 years of experience in North America. Committed to adding value through innovation, Polyglass utilizes the most technologically advanced manufacturing process in the industry with six state-of-the-art manufacturing facilities- five in North America and one in Italy which services all of Europe.

Since 2008, Polyglass has been a part of the Mapei® Group, a multi-billion dollar manufacturer in the building industry with over 31 research centers and more than 83 production facilities in 36 countries.

Polyglass prides itself in innovative and quality roofing products which exceed the needs and expectations of its customers all around the world. This commitment is demonstrated daily by the people that work for Polyglass where the customers' needs always come first.



Research & Development

As a leading company in the modified bitumen membrane waterproofing and roofing products category, Polyglass has consistently innovated throughout its history. Our patent portfolio includes but not limited to: "ADESO®" - a groundbreaking self-adhered dual-compound membrane, "SEAllap® ULTRA" - an enhanced bonding method for self-adhered membranes, and "Polyfresko®" an unsurpassed energy savings membrane that delivers exceptional solar reflectance.

Our multidisciplinary Research & Development team is comprised of Ph.Ds., chemists, material scientists and chemical, civil and mechanical engineers that interact with other departments to play a critical role in the development of new products, processes, innovations and ideas. R&D contributes to achieving our company's goals through the optimization of the manufacturing process, by implementing cost effective and improved installation techniques and by controlling the selection and approval of raw materials ensuring our customers receive quality products at an exceptional value that meet and exceed environmental, health and safety regulations.

The Research & Development department embraces and understands the many difficulties of meeting the demands of the building and waterproofing industries and is well equipped to meet these future challenges. Our research laboratories are equipped with cutting edge analytical and physical testing equipment to push the boundaries in the development of novel and innovative products and technologies that better serve our customer's needs and expectations.

Why Use Polyglass Polystick Self-Adhered Underlayments?

When deciding on what roof assembly to install, a quality roof underlayment can play a critical role in the performance of the roof system.

Provide your customers with the most technically advanced and time tested underlayment products on the market; build your business with long-term satisfied clients, reduced installation costs and fewer call backs.

Polyglass produces quality roof underlayments for steep slope roofs with:

- ADESO® Self-Adhered Dual-Compound Technology*
- Split-release film/paper for ease of installation
- Nail seal-ability
- Watertight protection
- Warranty up to 30 years
- Safe: no flames, fumes or odors
- Increased labor efficiency and roof dry-in speed

*except for Polystick P


Patent pending Burn-Shield Technology® provides fire resistance capable of achieving the highest level of fire ratings

Underlayments with ADESO® Self-Adhered Technology

ADESO Technology revolutionized the modified bitumen industry by manufacturing dual-compound self-adhered membranes using a true APP or SBS formulation on the top weathering side and an aggressive self-adhered formulation on the bottom side of the reinforcement.

ADESO® and other innovative Polyglass technologies provide for overall superior product and roof system performance:

- Patented SEAllap® on select underlayments, a factory-applied adhesive treatment along the side lap
- Surfaces engineered for superior slip resistance and long-term performance
- Asphaltic compound provides excellent weathering characteristics

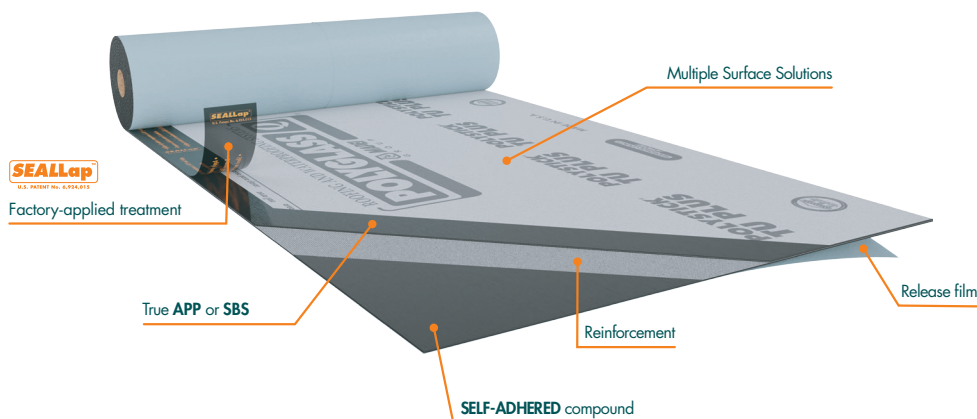

POLYSTICK MTS PLUS

Self-Adhered Multi-Purpose High Temp Underlayment

Versatile waterproofing barrier against water infiltration and ice dam conditions in high temp applications.

- Approved for environments to 265°F
- Designed for mechanically attached metal or tile roof systems
- Fiberglass reinforcement
- Split release film for easy application
- Slip resistant polypropylene film surface
- Exposure rating up to 180 days



POLYSTICK XFR

Self-Adhered Fire-Resistant High Temp Underlayment

Waterproofing and Class A fire resistance in a single layer* under metal and other approved roof coverings.

- Fire spread/penetration and ember resistance in systems tested under UL 790
- Cavitated anti-skid top film surface with up to 180 days exposure
- Fiberglass reinforced for added strength and dimensional stability
- Robust 80 mils (2 mm) of waterproofing rubberized asphalt
- Approved up to 265°F
- Max 180 days exposure

* Refer to published UL product listings (TGFU.R25992) for specific fire rated assemblies



POLYSTICK TU MAX

Self-Adhered Wind & Water Tile Underlayment

Waterproofing barrier against wind driven rain under roof tile applications. Flexible and lay-flat characteristics ideal for new construction applications.

- Tough polyester reinforced surface engineered for slip resistance and strong foam set adhesion
- Strong foam adhesive bond to top fabric and aggressive self-adhered bottom surface for increased wind-uplift resistance
- Approved up to 250°
- Max 180 days exposure



POLYSTICK TU PLUS

Self-Adhered Reinforced Wind & Water Tile Underlayment

Dual-reinforced waterproofing barrier designed against wind driven rain under roof tile applications. Robust membrane provides extra resistance to tile and substrate imperfections, ideal for re-roofing applications.

- Dual reinforcement provides added puncture resistance
- Polyester mat surface engineered for slip resistance and strong foam set adhesion
- Strong foam adhesive bond to top fabric & aggressive self-adhered bottom surface for increased wind-uplift resistance
- Approved up to 265°F
- Max 180 days exposure





Polystick MTS PLUS can be used as a single layer high temp underlayment or as a base layer in a two-ply system for up to 30 year warranty.



Polystick XFR provides tested ember & fire resistance for urban areas and regions prone to wildfires



Polystick TU Max has a tough top fabric design engineered for foam set or mechanically fastened tiles.



Polystick TU Plus has been a proven wind and waterproofing barrier for over 20 years.

POLYSTICK P

Self-Adhered Carrierless Ice & Water High Temp Underlayment

A highly flexible barrier against water infiltration and ice dam conditions in high temp applications.

- Highly flexible; ideal for flashing around roof penetrations and transitions and other critical areas
- Cool white top film with bi-directional laylines
- Skid-resistant surface embossing
- Rubberized asphalt bleed-out along edge ensures watertight seam
- Approved up to 250°F
- 180 days exposure



POLYSTICK TU P

Self-Adhered Reinforced Granule-Surfaced Tile Underlayment

Ultra-tough waterproofing underlayment engineered for use in roof tile applications.

- Surface engineered for superior slip resistance
- Tough 130 Mil thick & polyester-glass mat reinforced, scuff and puncture resistant
- Robust membrane holds-up to demands of heavy tile roofs
- Extended exposure time of 36 months



POLYSTICK IR-XE

Self-Adhered Ice & Water Protection Shingle Underlayment

Water infiltration and ice dam protection underlayment for full roof covering or critical areas.

- Surface engineered for superior slip resistance and long-term performance
- Aggressive self-adhesive compound for wind uplift protection
- Self-adhered technology increases labor efficiency and roof dry-in speed
- Asphaltic compound provides excellent weathering characteristics and nail seal-ability



Polystick IR-Xe is especially effective in valleys, eaves, around penetrations, and other demanding locations.

POLYSTICK PRODUCT	PRIMARY APPLICATION	OTHER APPROVED APPLICATIONS	HIGH TEMP	MAX EXPOSURE DAYS	INTERNAL REINFORCEMENT	SURFACE	NOMINAL THICKNESS	NET COVERAGE
MTS PLUS	Metal ¹	Tile ² , Slate	265°F	180	Fiberglass	Film	60 mils (1.5 mm)	200ft ² (18.5m ²)
XFR	Metal ³	Wood/Asphalt Shingles, Synthetic	265°F	180	Fiberglass	Film	80 mils (2.0 mm)	150ft ² (13.9m ²)
Polystick P	Metal ⁴	Asphalt Shingles, Synthetic	250°F	180	Non-Reinforced	High-tensile Film	42 mils (1.07 mm)	180ft ² (16.7m ²)
TU MAX	Clay/Concrete Tile	Slate	250°F	180	Non-Reinforced	Polyester Fabric	70 mils (1.8 mm)	200ft ² (18.5m ²)
TU PLUS	Clay/Concrete Tile	Slate	265°F	180	Fiberglass	Polyester Fabric	80 mils (2.0 mm)	200ft ² (18.5m ²)
TU P	Clay/Concrete Tile	Slate	N/A	1080	Polyester	Mineral	130 mils (3.3 mm)	100ft ² (9.3m ²)
IR-Xe	Asphalt Shingles		N/A	90	Fiberglass	Sand or Mineral	60 mils (1.5 mm)	180ft ² (16.7m ²)

1. Aluminum, Steel, or Copper Metal Coverings
2. Base membrane when covered with Polystick TU PLUS or Polystick TU MAX membranes
3. Achieves UL Class A fire rating as part of a roof covering assembly. Refer to published UL product listings (TGFU.R25992) for specific fire rated assemblies.
4. Aluminum or Steel Metal Coverings

All values are nominal at time of manufacturing and properties are “as manufactured” unless otherwise noted. Coverages are nominal and approximate and can vary depending on application method and selvage configuration.

Warranty Protection

We stand behind our products with the most reliable warranties in the industry. Our warranty programs provide extended protection, assuring the optimum system performance is guaranteed. We continue to safeguard our customers’ assets after the installation with our warranty support.

Polystick Roof Underlayments meet or exceed industry code approvals*:

- ASTM
 - UL Classified
 - ICC-ES
- Miami Dade County Approved
 - Florida Building Code
- Texas Department of Insurance
 - Listed by California State Fire Marshall



*See product Data Sheets for product-specific approvals.

U.S. Patent No. 6,924,015

SEALLAP®

110710488-P-06/19

- Apply products when the temperature is 40°F and rising.
- Remove film completely before application.
- Sheet must be rolled with 80 lb. roller.

AND WATERPROOF



POLYGLASS U.S.A., Inc.
1111 West Newport Center Drive
Deerfield Beach, FL 33442
pgmarketing@polyglass.com
Customer Service: (800) 222-9782

polyglass.us

© 2022 Polyglass U.S.A., Inc. All rights reserved.

All information printed is accurate at the time of publication and may change at any time with or without notice.
For the most up to date information and data, please visit our website at polyglass.us.

05/2022 | 3,000 - APPLE