

MAPEPLAN® P CLAD METAL

PVC COATED METAL SHEETS

PRODUCT DESCRIPTION

Mapeplan P Clad Metal is a 24-gauge hot-dipped galvanized steel sheet (G90) laminated with a 20-mil non-reinforced PVC membrane. The PVC surface allows heat welding of Mapeplan PVC roofing membranes directly to the metal, eliminating the need for separate adhesive strips. Mapeplan P Clad Metal is commonly used to fabricate roof perimeter edge metal and other flashing components. The sheets can be easily cut and formed to create custom edge profiles and flashing details.

TYPICAL APPLICATIONS

- Roof perimeter edge metal
- Drip edges
- Gravel stops
- Custom fabricated metal flashings

FEATURES AND BENEFITS

- Allows direct heat welding of Mapeplan PVC membrane to edge metal
- Eliminates the need for separate adhesive strips
- Helps reduce installation time and labor costs
- Easily cut and formed to create custom flashing profiles

AVAILABLE COLORS


White (WH) Grey (GR) Tan (TA)

APPLICATION INSTRUCTIONS

1. Install In Accordance with Mapeplan PVC Installation Instructions.
2. Install PVC Clad Metal with a $\frac{1}{8}$ " to $\frac{1}{4}$ " gap between adjoining sections.
3. Install 2" wide foil faced tape centered over each joint.
4. Heat weld Mapeplan P Trim Strip centered over each joint.
5. Position the PVC field membrane and heat weld to the PVC Clad Metal with a minimum $1\frac{1}{2}$ " weld.

PRECAUTIONS

- Store clad metal in a cool, shaded area and cover with light-colored, breathable, waterproof tarpaulins.
- PVC Clad Metal that has been exposed to the weather must be cleaned with MEK or acetone prior to hot-air welding
- Do not weld Mapeplan PVC FB directly to Mapeplan P Clad Metal

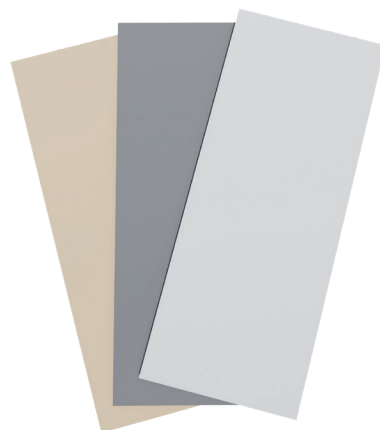

PRODUCT DATA

Sheet Size 4' x 10' (1.2 m x 3 m)
Weight..... 44 lb (20 kg)
Sheets/Pallet..... 10

PRODUCT CODES

- 84997006 – White
- 84997007 – Tan
- 84997008 – Grey

POLYGLASS®



www.polyglass.us

MAPEPLAN® P CLAD METAL

PVC COATED METAL SHEETS

MANUFACTURING FACILITIES

- Fernley, NV
- Hazleton, PA
- Waco, TX
- Winter Haven, FL

CORPORATE HEADQUARTERS

Polyglass U.S.A., Inc.
1111 West Newport Center Drive
Deerfield Beach, FL 33442
www.polyglass.us

General Line: (888) 410-1375
(954) 233-1330
Customer Service: (800) 222-9782
Technical Service: (866) 794-9659

Questions? technical@polyglass.com

Product Disclaimer: Unless otherwise incorporated into or part of a supplemental manufacturer's warranty, Polyglass warrants its product(s) against manufacturing defects in its product that directly results in leakage for a period of 1 year.

Refer to the Safety Data Sheet (SDS) for the referenced product, which provides comprehensive information on chemical, physical, and health hazards, as well as guidance on safe handling, use, storage, and disposal. All data furnished refers to standard production and is given in good faith within the applicable manufacturing and testing tolerances.

Polyglass U.S.A., Inc., reserves the right to improve and change its products at any time without prior notice. Polyglass U.S.A., Inc. cannot be held responsible for the use of its products under conditions beyond its own control. For most current product data and warranty information, visit www.polyglass.us.



POLYGLASS®



www.polyglass.us